


Load Class
up to C250
EN-1433 Standard

M100K



ULMA Linear Drainage Channel type M100K: External width 130 mm; Internal width 100 mm and overall height 80 mm to collect rainwater in 1 metre long units. Integrated galvanised steel* edges for lateral protection. Locking system consists of 2 screws per metre.

*Also available with stainless steel edge protection.

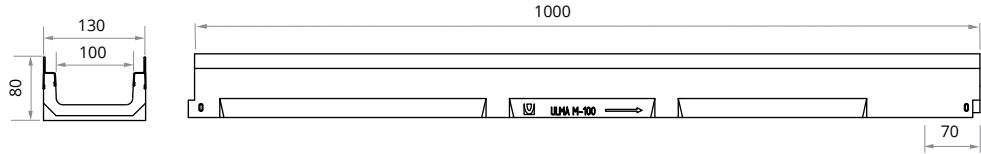


CHANNEL

Code Channel	L mm	H mm	Width mm		Ø Outlet* mm		Hydraul. Section cm ²	Pcs. pallet	Weight Kg	Qref l/s
			Ext.	Int.	Vert.	Hor.				
M100K	1000	80	130	100	90	-	40	120	9,8	0,8

* Vertical outlets on order


GRATING

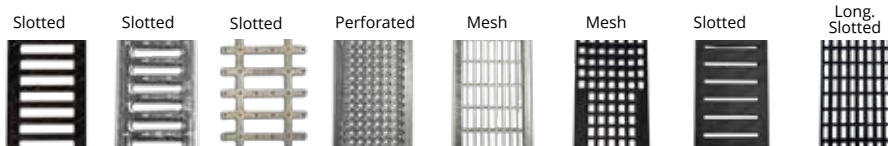

Material	Design	Load	Code	L mm	Width mm	Opening mm	Weight Kg	Intake area cm ² /ml
DUCTILE IRON	SLOTTED	B125	FNX100KCBM	500	123	14	2,7	476
	SLOTTED	C250	FNX100KCCM	500	123	14	2,9	486
	HEELPROOF SLOTTED	C250	FNHX100KCCM	500	123	5	3,7	174
DUCTILE IRON STAINLESS	SLOTTED	D400	FIN100KCDM	500	123	19,9	3,5	695
GALVANISED STEEL	PERFORATED	A15	GP100KCA	1000	123	Ø6	1,1	158
	SLOTTED	A15	GN100KCA	1000	123	9	1,6	282
	MESH	B125	GEX100KCB	1000	123	30 x 20	3,3	823
	HEELPROOF MESH *	B125	GEHX100KCB	1000	123	30 x 10	4,0	743
STAINLESS STEEL	SLOTTED	A15	IN100KCA	1000	123	7	1,4	216
	PERFORATED	A15	IP100KCA	1000	123	Ø6	1,2	158
COMPOSITE	HEELPROOF SLOTTED BLACK	A15	PNH100KCAM	500	123	5	0,6	159
	HEELPROOF SLOTTED GREY	A15	PNH100KCAM-GRIS	500	123	5	0,6	159
	LONG. SLOTTED BLACK	A15	PNLH100KCAM	500	123	8	0,3	484
	LONG. SLOTTED GREY	A15	PNLH100KCAM-GRIS	500	123	8	0,3	484
	MESH	B125	PE100KCBM	500	123	14 x 12,5	0,5	553

* Available in stainless steel, consult design

HOW TO FIX



Code	Units ml
TEF860	2
TEF860	2
TEF860	2
TXE860	2
TNPC870	2
TNPC860	2
TEF855	2
TEF855	2
TXNPC860	2
TXNPC870	2
TXE860	2
TXE860	2
TXE860	2
TXE860	2
TXE860	2

CLOSED END CAP

Code
T100MKC