

Load Class up to C250 EN-1433 Standard


M200K



ULMA Linear Drainage Channel type M200K: External width 260 mm; Internal width 200 mm and overall height 125 mm to collect rainwater in 1 metre long units. Integrated galvanised steel* edges for lateral protection. Locking system consists of 2 screws per metre.



*Also available with stainless steel edge protection.

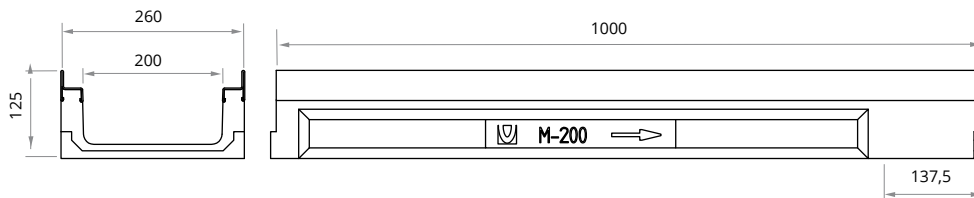


CHANNEL


Code Channel	L mm	H mm	Width mm		Ø Outlet* mm		Hydraul. Section cm²	Pcs. pallet	Weight Kg	Qref l/s
			Ext.	Int.	Vert.	Hor.				
M200K	1000	125	260	200	160	-	157	40	27,2	5,5

* Vertical outlets on order

GRATING



HOW TO FIX



Material	Design	Load	Code	L mm	Width mm	Opening mm	Weight Kg	Intake area cm²/ml	Code	Units ml
									DUCTILE IRON	SLOTTED
GALVANISED STEEL	MESH*	B125	GEX200KCB	1000	250	30 x 20	8,0	1846	TEF8100	2

* Available in stainless steel, consult design

CLOSED END CAP

Code	
T200MKC	

