


Load Class
up to C250
EN-1433 Standard

M300K



ULMA Linear Drainage Channel type M300K: External width 362 mm; Internal width 300 mm and overall height 150 mm to collect rainwater in 1 metre long units. Integrated galvanised steel edges for lateral protection. Locking system consists of locking bar CS300 and screws.

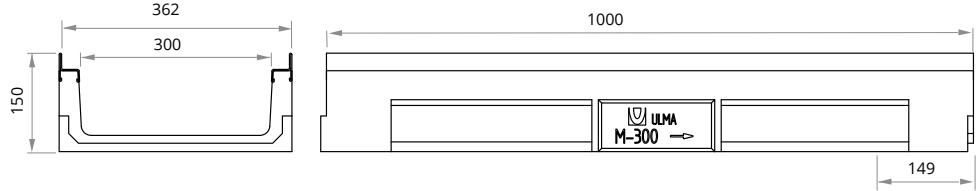


CHANNEL

Code Channel	L mm	H mm	Width mm		Ø Outlet* mm		Hydraul. Section cm ²	Pcs. pallet	Weight Kg	Qref l/s
			Ext.	Int.	Vert.	Hor.				
M300K	1000	150	362	300	200	-	294	24	33,2	11,8

* Vertical outlets on order


GRATING



Material	Design	Load	Code	L mm	Width mm	Opening mm	Weight Kg	Intake area cm ² /ml
DUCTILE IRON	SLOTTED	C250	FNX300KCCM	500	351	14	15,3	1368
GALVANISED STEEL	MESH*	B125	GEX300KCB	1000	351	30 x 20	13,2	2672

* Available in stainless steel, consult design

HOW TO FIX



Code	Units ml
TEF1080 + CS300	2 + 2
TEF1080 + CS300	2 + 2

CLOSED END CAP

Code
T300MKC