


Load Class
up to C250
EN-1433 Standard

SELF200K



ULMA Linear Drainage Channel type SELF200K: External width 204 mm; Internal width 150 mm and overall height 162 mm to collect rainwater in 1 metre long units. Integrated galvanised steel* edges for lateral protection. Locking system consists of locking bar CS150 and screws.

*Also available with stainless steel edge protection.

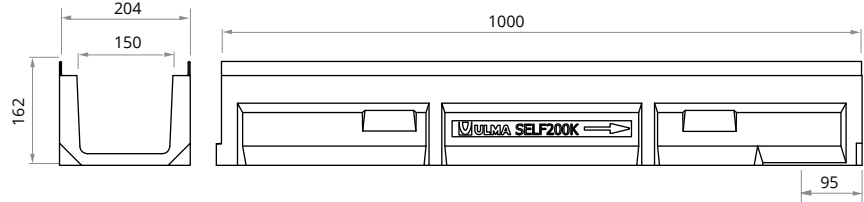


CHANNEL

Code Channel	L mm	H mm	Width mm		Ø Outlet* mm		Hydraul. Section cm ²	Pcs. pallet	Weight Kg	Qref l/s
			Ext.	Int.	Vert.	Hor.				
SELF200K	1000	162	204	150	160	-	180	40	19,7	7,6

* Vertical outlets on order

GRATINGS

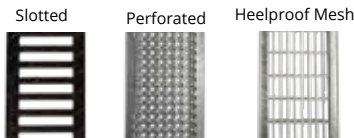

Material	Design	Load	Code	L mm	Width mm	Opening mm	Weight Kg	Intake area cm ² /ml
DUCTILE IRON	SLOTTED	C250	FNX150KCCM	500	195	14	5,2	720
	PERFORATED	A15	GP150KCA	1000	195	Ø5	4,1	196
GALVANISED STEEL	MESH	B125	GEX150KCB	1000	195	30 x 20	5,6	1413
	HEELPROOF MESH*	B125	GEHX150KCB	1000	195	30 x 10	6,6	1133
STAINLESS STEEL	PERFORATED	A15	IP150KCA	1000	195	Ø5	4,1	196

* Available in stainless steel, consult design

HOW TO FIX

Locking bar and 2 screws



Code	Units ml
TEF880 + CS150	2 + 2
TNPC890 + CS150	2 + 2
TEF880 + CS150	2 + 2
TEF880 + CS150	2 + 2
TXNPC890 + CS150INOX	2 + 2

SUMP UNITS

Code	L mm	H mm	Width mm	Lateral outlets Ø mm	Front outlet Ø mm	Sump units	Weight Kg
ASELF200K	500	400	204	160/200	160	1	28,9

BUCKET

Code
CSELF200

OPEN END CAP

Code	Ø mm
TSELF200KA	110

CLOSED END CAP

Code
TSELF200KC

