


Load Class
up to C250
EN-1433 Standard

SELF250K



ULMA Linear Drainage Channel type SELF250K: External width 260 mm; Internal width 200 mm and overall height 180 mm to collect rainwater in 1 metre long units. Integrated galvanised steel edges for lateral protection. Locking system consists of locking bar CS200 and screws.

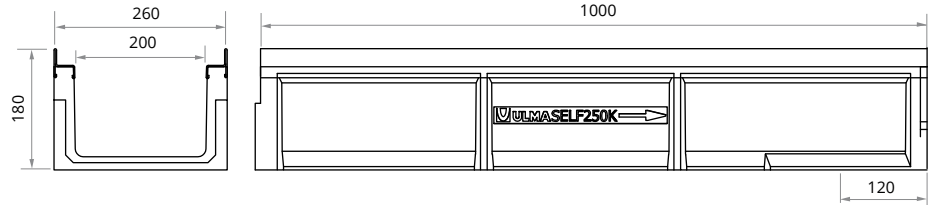


CHANNEL

Code Channel	L mm	H mm	Width mm		Ø Outlet* mm		Hydraul. Section cm ²	Pcs. pallet	Weight Kg	Qref l/s
			Ext.	Int.	Vert.	Hor.				
SELF250K	1000	180	260	200	160/200	-	260	28	27,5	12,6

* Vertical outlets on order

GRATINGS



Material	Design	Load	Code	L mm	Width mm	Opening mm	Weight Kg	Intake area cm ² /ml
DUCTILE IRON	SLOTTED	C250	FNX200KCCM	500	250	14	7,2	919
GALVANISED STEEL	MESH*	B125	GEX200KCB	1000	250	30 x 20	8,0	1846

* Available in stainless steel, consult design

HOW TO FIX

Locking bar and 2 screws



Code	Units ml
TEF1080 + CS200	2 + 2
TEF1080 + CS200	2 + 2

SUMP UNITS


Code	L mm	H mm	Width mm	Lateral outlets Ø mm	Front outlet Ø mm	Sump units	Weight Kg
ASELF250K	500	500	260	315	160	1	47,9

BUCKET

Code
CSELF250

OPEN END CAP

Code	Ø mm
TSELF250KA	160



CLOSED END CAP

Code
TSELF250KC

