


Load Class  
up to C250  
EN-1433 Standard

# SELFK



ULMA Linear Drainage Channel type SELFK: External width 130 mm; Internal width 100 mm and overall height 100 mm to collect rainwater in 1 metre long units. Integrated galvanised steel\* edges for lateral protection. Locking system consists of 2 screws per metre.

\*Also available with stainless steel edge protection

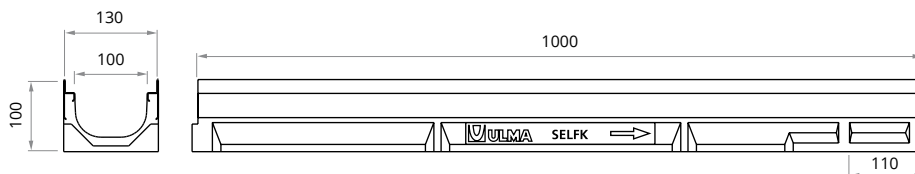


## CHANNEL

Code Channel	L mm	H mm	Width mm		Ø Outlet* mm		Hydraul. Section cm <sup>2</sup>	Pcs. pallet	Weight Kg	Qref l/s
			Ext.	Int.	Vert.	Hor.				
SELFK	1000	100	130	100	110	-	53	105	11,1	1,5

\* Vertical outlets on order


## GRATINGS

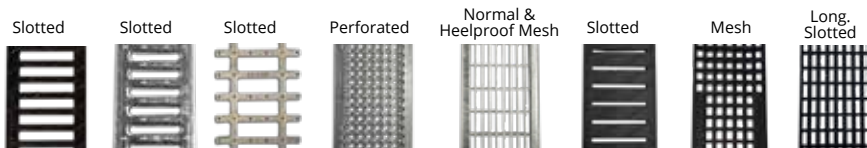

Material	Design	Load	Code	L mm	Width mm	Opening mm	Weight Kg	Intake area cm <sup>2</sup> /ml	HOW TO FIX	
									Code	Units ml
DUCTILE IRON	SLOTTED	B125	FNX100KCBM	500	123	14	2,7	476	TEF880	2
	SLOTTED	C250	FNX100KCCM	500	123	14	2,9	486	TEF880	2
	HEELPROOF SLOTTED	C250	FNHX100KCCM	500	123	5	3,7	174	TEF880	2
STAINLESS DUCTILE IRON	SLOTTED	D400	FIN100KCDM	500	123	19,9	3,5	695	TXE880	2
GALVANISED STEEL	PERFORATED	A15	GP100KCA	1000	123	Ø6	1,1	158	TNPC890	2
	SLOTTED	A15	GN100KCA	1000	123	9	1,6	282	TNPC890	2
	MESH*	B125	GEX100KCB	1000	123	30 x 20	3,3	823	TEF880	2
	HEELPROOF MESH *	B125	GEHX100KCB	1000	123	30 x 10	4,0	743	TEF880	2
STAINLESS STEEL	SLOTTED	A15	IN100KCA	1000	123	7	1,4	216	TXNPC890	2
	PERFORATED	A15	IP100KCA	1000	123	Ø6	1,2	158	TXNPC890	2
COMPOSITE	HEELPROOF SLOTTED BLACK	A15	PNH100KCAM	500	123	5	0,6	159	TXE880	2
	HEELPROOF SLOTTED GRAY	A15	PNH100KCAM-GRIS	500	123	5	0,6	159	TXE880	2
	LONG.SLOTTED BLACK	A15	PNLH100KCAM	500	123	8	0,3	484	TXE880	2
	LONG.SLOTTED GRAY	A15	PNLH100KCAM-GRIS	500	123	8	0,3	484	TXE880	2
	MESH	B125	PE100KCBM	500	123	14 x 12,5	0,5	553	TXE880	2

\* Available in stainless steel, consult design

## HOW TO FIX



## SUMP UNITS

Code	L mm	H mm	Width mm	Lateral outlets Ø mm	Front outlet Ø mm	Sump units	Weight Kg
AEURO100K	500	318	130	90/110	90	1	15,2

## BUCKET

Code
CEURO100

## CLOSED END CAP

Code
TSELF100KC

