


Load Class
up to C250
EN-1433 Standard

SELF350K

ULMA Linear Drainage Channel type SELF350K: External width 362 mm; Internal width 300 mm and overall height 210 mm to collect rainwater in 1 metre long units. Integrated galvanised steel edges for lateral protection. Locking system consists of locking bar CS300 and screws.

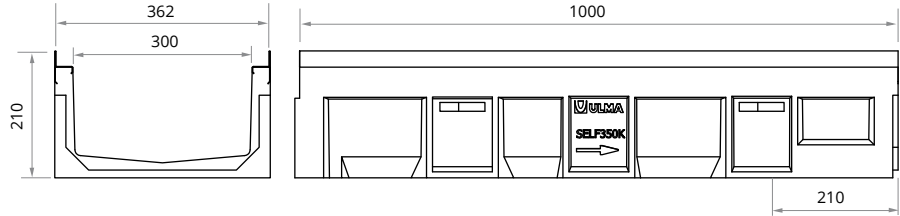


CHANNEL

Code Channel	L mm	H mm	Width mm		Ø Outlet* mm		Hydraul. Section cm ²	Pcs. pallet	Weight Kg	Qref l/s
			Ext.	Int.	Vert.	Hor.				
SELF350K	1000	210	362	300	250	-	455	21	40,3	23,3

* Vertical outlets on order


GRATINGS



Material	Design	Load	Code	L mm	Width mm	Opening mm	Weight Kg	Intake area cm ² /ml	Code	Units ml
DUCTILE IRON	SLOTTED	C250	FNX300KCCM	500	351	14	15,3	1368	TEF1090 + CS300	2 + 2
GALVANISED STEEL	MESH*	B125	GEX300KCB	1000	351	30 x 20	13,2	2672	TEF1090 + CS300	2 + 2

* Available in stainless steel, consult design

HOW TO FIX



SUMP UNITS

Code	L mm	H mm	Width mm	Lateral outlets Ø mm	Front outlet Ø mm	Sump units	Weight Kg
ASELF350K	500	500	362	315	160/200	1	56,3

BUCKET

Code
CSELF350

OPEN END CAP

Code	Ø mm
TSELF350KA	160

CLOSED END CAP

Code
TSELF350KC

